


Motorized Trolley

Single-Phase

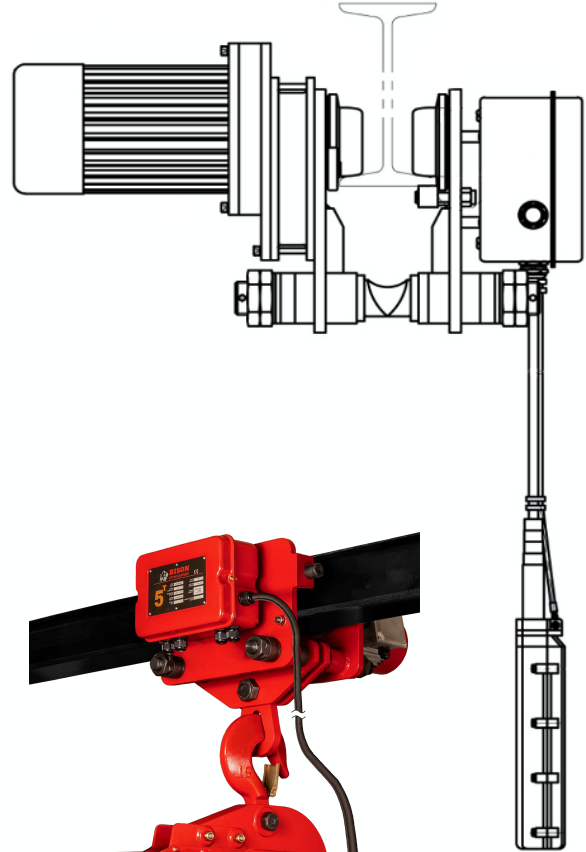

The **Single-Phase Motorized Trolley** is fitted with its own 24V transformer, contactors and pendant controller, and can operate without the need of a hoist.

A single-phase hoist will simply hook directly onto the shaft of the trolley. There are auxiliary power and control wires coming from the trolley. These are intended to take the place of the hoist's pendant controller and power cord, allowing the motorized trolley and hoist to operate from 1 power feed and 1 pendant controller.

Standard Voltage

115v/ 230v Single-Phase, 60 Hz

Ratings

Pendant: IP65

Trolley: IP55

Standard Pendant Cord Length

17 Ft (custom lengths available)

Standard Power Cord Length

15 Ft (custom lengths available)

Control Voltage

24v


Duty Cycle

25% ED

Capacity Range

1/4 – 5 Ton



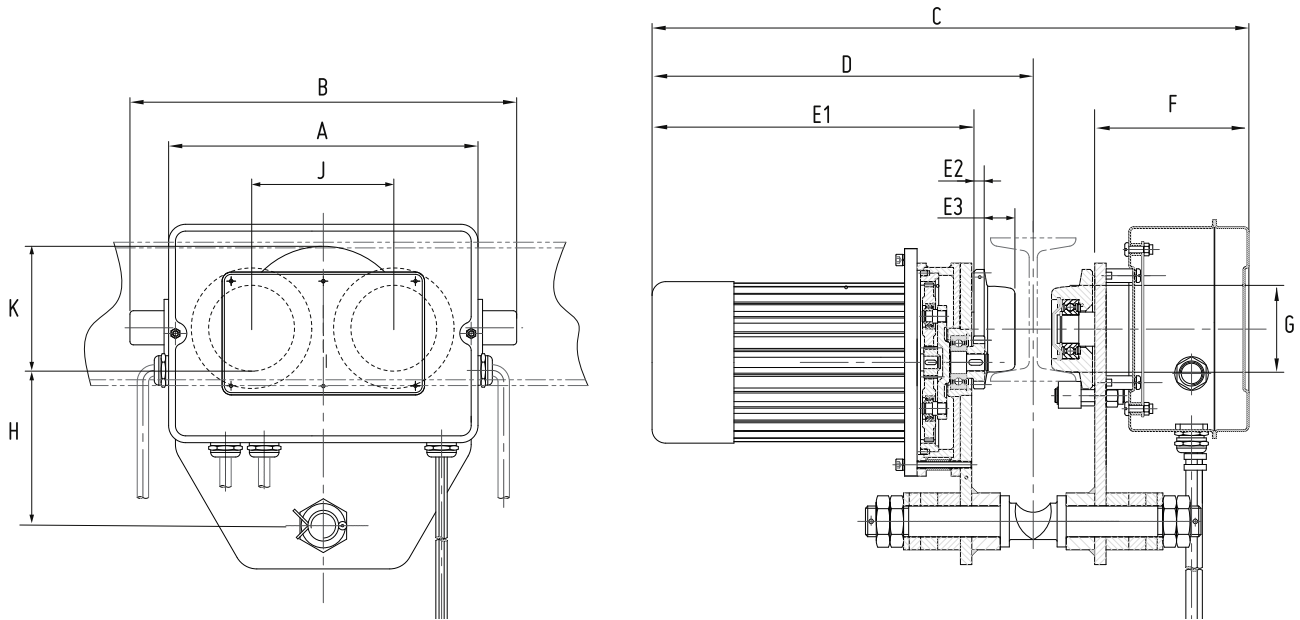

Product Code	Capacity	Beam Width	Running Speed	Power Supply	Control Voltage	Net Weight
	<i>tons</i>	<i>inches</i>	<i>ft/min</i>	<i>Volts (1- Phase)</i>	<i>Volts</i>	<i>lbs</i>
HH-B025-T	1/4	2.95 - 7.09	33	115 / 230	24	106
HH-B05-T	1/2	2.95 - 7.09	33	115 / 230	24	106
HH-B10-T	1	2.95 - 7.09	33	115 / 230	24	106
HH-B020-T	2	2.95 - 7.09	33	115 / 230	24	110
HH-B030-T	3	3.94 – 7.99	33	115 / 230	24	119
HH-B500-T	5	3.94 – 7.99	31	115 / 230	24	165

Product Code	A	B	C	D	E1	E2	E3	F	G	H	J	K
	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>
HH-B025-T	10.71	13.39	21.97	14.49	12.36	0.57	0.91	5.35	2.95	5.24	4.92	5.75
HH-B05-T	10.71	13.39	21.97	14.49	12.36	0.57	0.91	5.35	2.95	5.24	4.92	5.75
HH-B10-T	10.71	13.39	23.19	14.49	12.36	0.57	0.91	5.35	2.95	5.24	4.92	5.75
HH-B020-T	10.71	13.39	23.19	15.24	12.52	0.57	0.94	5.43	2.95	5.24	4.92	5.83
HH-B030-T	10.71	15.43	23.46	15.39	12.72	0.59	1.18	5.43	3.78	5.24	5.67	6.04
HH-B500-T	10.71	18.98	23.46	15.39	12.72	0.79	1.42	5.59	4.72	10.25	6.77	6.34